

TOOLS

Flat screwdriver and short Phillips screwdriver
Pliers or pipe wrench



1 Open the lining zipper where the telescopic handle is located.




2 Open the bag wide to easily access the rigid structure.



3 Using pliers, hold the nut and, with a flathead screwdriver, unscrew the two screws from the cover.



4 Keep the two screws, two nuts, and two washers.

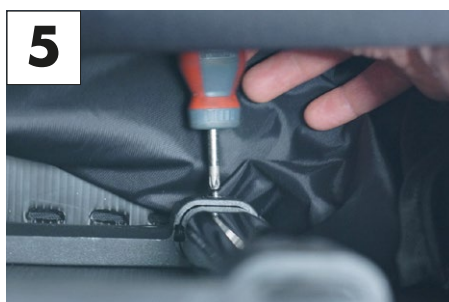

5 At the bottom of the bag, unscrew the two screws at the base of the handle using a short Phillips screwdriver. Keep the two screws.



6 Remove the telescopic handle and its cover.



7 Take a new telescopic handle with its cover.



8 Position the new handle in the same place as the old one. Reinstall the two screws with washers and nuts, then the two screws at the base of the handle.



9 Close the lining zipper. Check that it operates properly.